

Details:


- LinearLight 2-COB is a small profile, versatile LED strip with best-in-class CRI available for a variety of applications. LinearLight 2-COB is provided an output of 366lm/ft @ 3000k
- Stocked in 192" lengths but can be factory cut and delivered to project site based on site specific measurements by the Convey Team.

Physical Features:


- Factory cut lengths to 1.97" Increments with diode free illumination.
- 3M (300LSE) yellow adhesive tape attached on backside, standard.
- Suitable for all BE2 Profiles.
- 96" Power Leads standard.

Lighting Features:

- 150° beam spread
- 50,000hr. Life (L70)
- 5 year warranty
- TM-30 data available at www.conveylighting.com

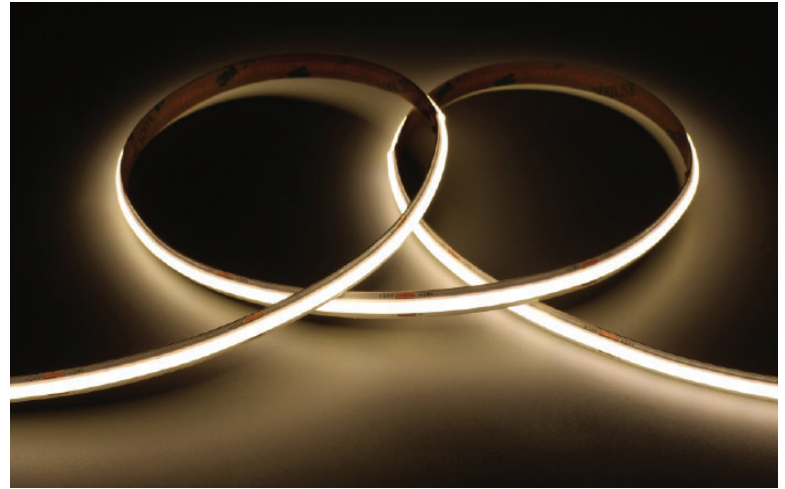

Profile:

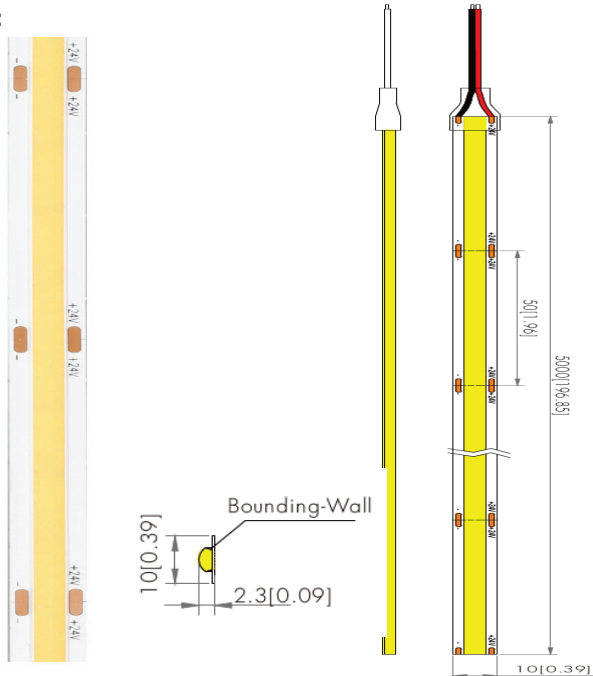

Specifications:

Average Power Consumption	3.7W/ft.
Voltage	24V/dc
Binning	3 step
Cut Increment	1.97"
Diodes per foot	146
Max. Run	16ft.
IP Rating	IP20 (Dry location) or IP67 (Wet)
Dimensions	0.39"W x 0.09"H (* See IP67 Note)

CCT	Lumen Output (lm/ft.)	Efficacy (lm/W)
2400K @98CRI	318	86
2700K @98CRI	335	90
3000K @98CRI	366	99
3500K @ 98CRI	395	106
4000K @ 98CRI	402	108

1800K and 2200K Data Available upon request - special order.

Ordering Information:

Example:
L2COB-SW3.7-30-14'

Model: - CCT: - Length: - Transformer/PSU

L2COB-SW3.7 3.7W/ft.

18 1800K, 90CRI
22 2200K, 98CRI
24 2400K, 98CRI
27 2700K, 98CRI
30 3000K 98CRI
35 3500K, 98CRI
40 4000K, 98CRI,

1'-16'
C SPECIFY
 CUSTOM

TXXX SPECIFIED
 SEPARATELY

L2COBW-SW3.7

See Note on IP67
 (*)

(*) L2COBW IP67 Version dimensions increase to 0.47"W x 0.16"H