

### Details:

- LinearLight 3-SW3.0 is a medium profile, versatile, high efficacy LED strip with best-in-class CRI available for a variety of applications. LinearLight 3-SW3.0 is provided in outputs ranging from 409lm/ft. to 525lm/ft.
- Stocked in 192" lengths but can be factory cut and delivered to project site based on site specific measurements by the Convey Team.

### Physical Features:


- Factory cut lengths to 1.97" Increments.
- 3M (300LSE) yellow adhesive tape attached on backside, standard
- Complete factory assembly with any Series BE3 or BE4 Profiles.
- 96" Power Leads

### Lighting Features:

- 120° beam spread
- 50,000hr. Life (L70)
- 5 year warranty



### Profile:

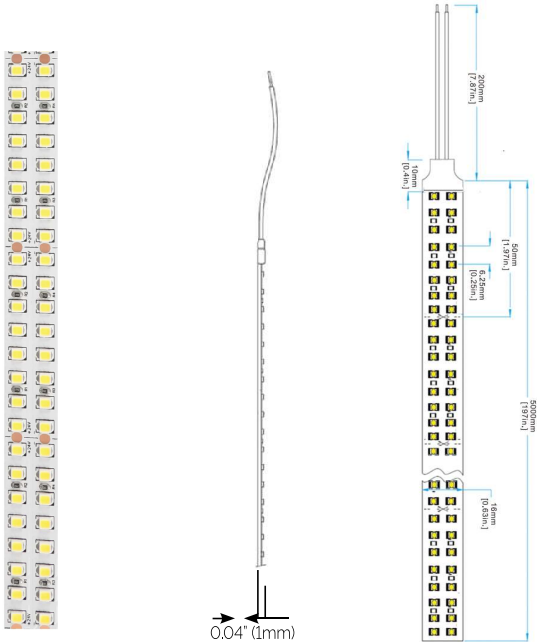

### Specifications:

|                           |                              |
|---------------------------|------------------------------|
| Average Power Consumption | 3.0W/ft.                     |
| Voltage                   | 24V/dc                       |
| Binning                   | 3 step                       |
| Cut Increment             | 1.97"                        |
| Diodes per foot           | 96                           |
| Max. Run                  | 16ft.                        |
| IP Rating                 | IP20 (Class II dry location) |
| Dimensions                | 0.63"W x 0.04"H              |

| CCT          | Lumen Output (lm/ft.) | Efficacy (lm/W) |
|--------------|-----------------------|-----------------|
| 1800K @90CRI | 409                   | 136             |
| 2200K @90CRI | 430                   | 144             |
| 2400K @95CRI | 441                   | 147             |
| 2700K @98CRI | 462                   | 154             |
| 3000K @98CRI | 472                   | 157             |
| 3500K @98CRI | 498                   | 166             |
| 4000K @98CRI | 525                   | 175             |

### Ordering Information:

Example:  
L3-SW3.0-30-16'

|                          |  |  |                                     |
|--------------------------|--|--|-------------------------------------|
| Model:                   | CCT:   | Length:                                  | Transformer/PSU                     |
| <input type="text"/>     | <input type="text"/>   | <input type="text"/>                     | <input type="text"/>                |
| <b>L3-SW3.0</b> 3.0W/ft. | <b>18</b> 1800K, 90CRI<br><b>22</b> 2200K, 90CRI<br><b>24</b> 2400K, 95CRI<br><b>27</b> 2700K, 98CRI<br><b>30</b> 3000K, 98CRI<br><b>35</b> 3500K, 98CRI<br><b>40</b> 4000K, 98CRI | <b>1'-16'</b> SPECIFY<br><b>C</b> CUSTOM | <b>TXXX</b> SPECIFIED<br>SEPARATELY |

