

## Details:

- LinearLight 2-TW4.4 is a small profile, versatile, tunable white LED strip with best-in-class CRI available for a variety of applications. LinearLight 2-TW4.4 is provided in an output of 288lm/ft.
- Stocked in 192" lengths but can be factory cut and delivered to project site based on site specific measurements by the Convey Team.

## Physical Features:


- Factory cut lengths to 1.64" Increments.
- 3M (300LSE) yellow adhesive tape attached on backside, standard
- Complete factory assembly with any Series BE2 Profiles.
- 96" Power Leads

## Lighting Features:

- 120° beam spread
- 50,000hr. Life (L70)
- 5 year warranty
- TM-30 data available at [www.conveylighting.com](http://www.conveylighting.com)



## Profile:

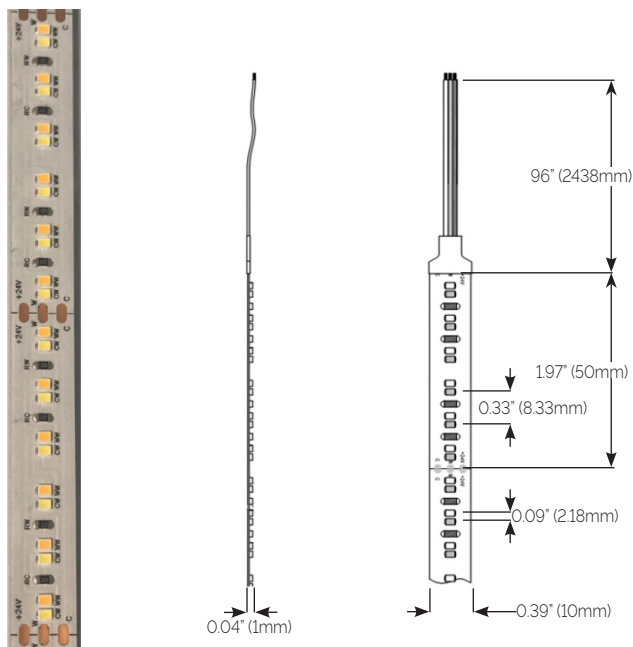

## Specifications:

|                           |                              |
|---------------------------|------------------------------|
| Average Power Consumption | 4.4W/ft.                     |
| Voltage                   | 24V/dc                       |
| Binning                   | 3 step                       |
| Cut Increment             | 1.97"                        |
| Diodes per foot           | 73                           |
| Max. Run                  | 16ft.                        |
| IP Rating                 | IP20 (Class II dry location) |
| Dimensions                | 0.39"W x 0.04"H              |

| CCT                       | Lumen Output (lm/ft.) | Efficacy (lm/W) |
|---------------------------|-----------------------|-----------------|
| 2700K, 6500K @98CRI       | 288                   | 66              |
| 1800K@90CRI, 4000K @98CRI | 288                   | 66              |
| 1800K@90CRI, 3000K @98CRI | 288                   | 66              |

## Ordering Information:

Example:  
L2-TW4.4-27/65-30'

|                          |  |  |                                     |
|--------------------------|--|--|-------------------------------------|
| Model:                   | CCT:   | Length:                                  | Transformer/PSU                     |
| <input type="text"/>     | <input type="text"/>   | <input type="text"/>                     | <input type="text"/>                |
| <b>L2-TW4.4</b> 4.4W/ft. | <b>27/65</b> 2700K/6500K<br><b>18/40</b> 1800K/4000K<br><b>18/30</b> 1800K/3000K | <b>1'-16'</b> SPECIFY<br><b>C</b> CUSTOM | <b>TXXX</b> SPECIFIED<br>SEPARATELY |



LM-80

