

## Details:

- LinearLight 2-SW5.4 is a small profile, versatile LED strip with best-in-class CRI available for a variety of applications. LinearLight 2-SW5.4 is provided in outputs ranging from 429lm/ft. to 595lm/ft.
- Stocked in 192" lengths but can be factory cut and delivered to project site based on site specific measurements by the Convey Team.

## Physical Features:


- Factory cut lengths to 2.46" Increments.
- 3M (300LSE) yellow adhesive tape attached on backside, standard
- Complete factory assembly with any Series BE2 Profiles.
- 96" Power Leads

## Lighting Features:

- 120° beam spread
- 50,000hr. Life (L70)
- 5 year warranty
- TM-30 data available at [www.conveylighting.com](http://www.conveylighting.com)



## Profile:

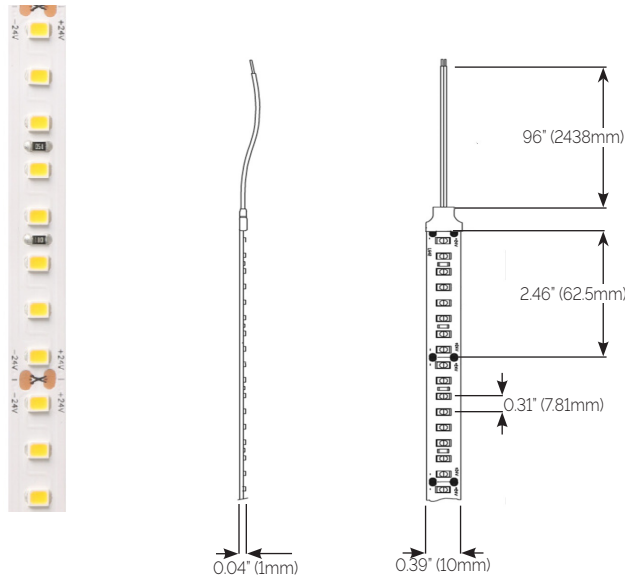

## Specifications:

|                           |                              |
|---------------------------|------------------------------|
| Average Power Consumption | 5.4W/ft.                     |
| Voltage                   | 24V/dc                       |
| Binning                   | 3 step                       |
| Cut Increment             | 2.46"                        |
| Diodes per foot           | 39                           |
| Max. Run                  | 16ft.                        |
| IP Rating                 | IP20 (Class II dry location) |
| Dimensions                | 0.39"W x 0.04"H              |

| CCT          | Lumen Output (lm/ft.) | Efficacy (lm/W) |
|--------------|-----------------------|-----------------|
| 1800K @90CRI | 429                   | 97              |
| 2200K @90CRI | 467                   | 86              |
| 2400K @95CRI | 487                   | 90              |
| 2700K @98CRI | 519                   | 96              |
| 3000K @98CRI | 547                   | 101             |
| 3500K @98CRI | 595                   | 110             |
| 4000K @98CRI | 595                   | 110             |

## Ordering Information:

Example:  
L2-SW5.4-30-32'

|                          |                                                                                                                                                                                    |                                          |                                  |
|--------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------------------------------------|----------------------------------|
| Model:                   | CCT:                                                                                                                                                                               | Length:                                  | Transformer/PSU                  |
| <input type="text"/>     | <input type="text"/>                                                                                                                                                               | <input type="text"/>                     | <input type="text"/>             |
| <b>L2-SW5.4</b> 6.4W/ft. | <b>18</b> 1800K, 90CRI<br><b>22</b> 2200K, 90CRI<br><b>24</b> 2400K, 95CRI<br><b>27</b> 2700K, 98CRI<br><b>30</b> 3000K, 98CRI<br><b>35</b> 3500K, 98CRI<br><b>40</b> 4000K, 98CRI | <b>1'-16'</b><br><b>C</b> SPECIFY CUSTOM | <b>TXXX</b> SPECIFIED SEPARATELY |



LM-80

