

Details:

- LinearLight 1-SW1.8 is a versatile LED strip in our smallest profile with best-in-class CRI available for a variety of applications. LinearLight 1-SW1.8 is provided in outputs ranging from 164lm/ft. to 200lm/ft.
- Stocked in 192" lengths but can be factory cut and delivered to project site based on site specific measurements by the Convey Team.

Physical Features:


- Factory cut lengths to 1/64" Increments.
- 3M (300LSE) yellow adhesive tape attached on backside, standard
- Complete factory assembly with any Series BE1 Profiles.
- 96" Power Leads

Lighting Features:

- 120° beam spread
- 50,000hr. Life (L70)
- 5 year warranty
- TM-30 data available at www.conveylighting.com



Profile:

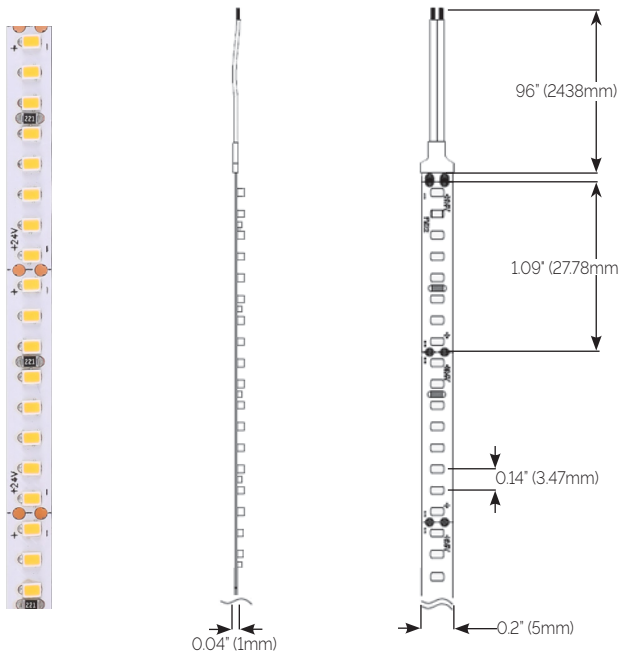

Specifications:

Average Power Consumption	1.8W/ft.
Voltage	24V/dc
Binning	3 step
Cut Increment	1.09"
Diodes per foot	88
Max. Run	53ft.
IP Rating	IP20 (Class II dry location)
Dimensions	0.2"W x 0.04"H

CCT	Lumen Output (lm/ft.)	Efficacy (lm/W)
1800K @90CRI	182	100
2200K @90CRI	164	90
2400K @95CRI	173	95
2700K @98CRI	182	100
3000K @98CRI	190	105
3500K @98CRI	200	110
4000K @98CRI	200	110

Ordering Information:

Example:
L1-SW18-30-32'

Model:	CCT:	Length:	Transformer/PSU
L1-SW1.8 1.8W/ft.	18 1800K, 90CRI 22 2200K, 90CRI 24 2400K, 95CRI 27 2700K, 98CRI 30 3000K, 98CRI 35 3500K, 98CRI 40 4000K, 98CRI	1'-16' C SPECIFY CUSTOM	TXXX SPECIFIED SEPARATELY



LM-80

